

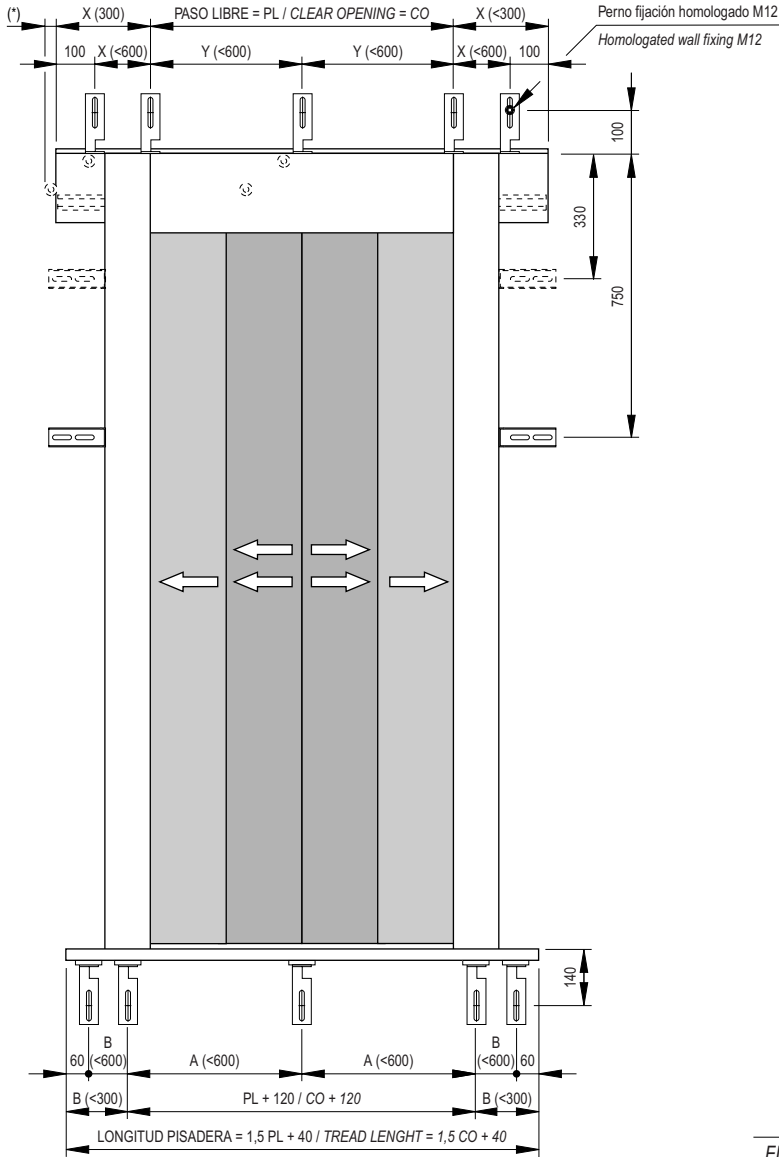


*: EN POSICIÓN DE PUERTA ABIERTA, EL ENCLAVAMIENTO SOBRESALE 40 mm EN PL 600 Y 15 mm EN PL 700.
*: IN OPEN DOOR POSITION, THE LOCKING DEVICE STICKS OUT 40 mm IN CO 600 AND 15 mm IN CO 700.

Puerta con un enclavamiento
Door with one locking device

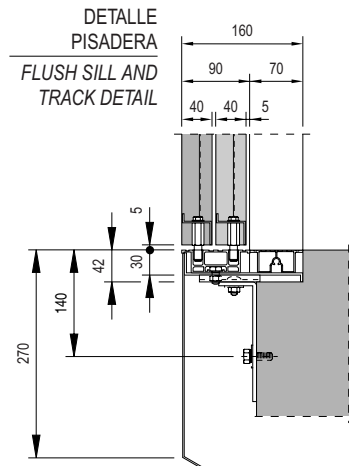

*: A PARTIR DE PL 950, COTA = 160
*: FROM THE CO 950, DIMENSION = 160

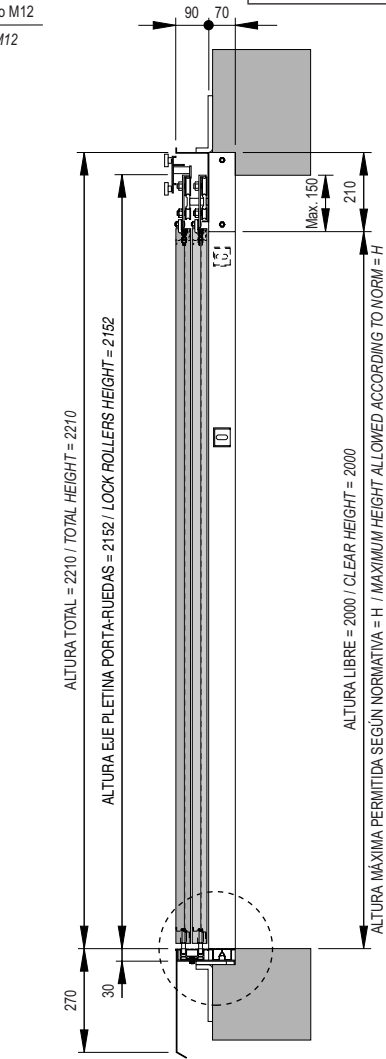

PL / CO	600	650	700	750	800	900	1000	1100
A	360	385	410	435	460	340	373	407
B	140	152	165	177	190	215	240	265
C	1000	1075	1150	1225	1300	1450	1600	1750
X	200	212	225	237	250	275	300	225
Y	600	325	350	375	400	450	500	550
H	≤2500							
R	2	3	3	3	3	3	3	5
S	3	3	3	3	3	4	4	4
T	7	8	8	8	8	9	9	11

- Puertas homologadas TÜV (DIN 18091).
R: N° de soportes en mecanismo de rellano.
S: N° de soportes en apoyo pisadera.
T: N° de soportes total.
- Doors certified by TÜV (DIN 18091).
R: Number of supports for landing mechanism.
S: Number of supports for support track.
T: Total number of supports.