

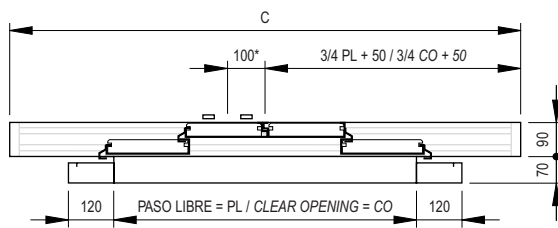


\*: EN POSICIÓN DE PUERTA ABIERTA, EL ENCLAVAMIENTO SOBRESALE 40 mm EN PL 600 Y 15 mm EN PL 700.  
\*: IN OPEN DOOR POSITION, THE LOCKING DEVICE STICKS OUT 40 mm IN CO 600 AND 15 mm IN CO 700.

Puerta con un enclavamiento  
Door with one locking device

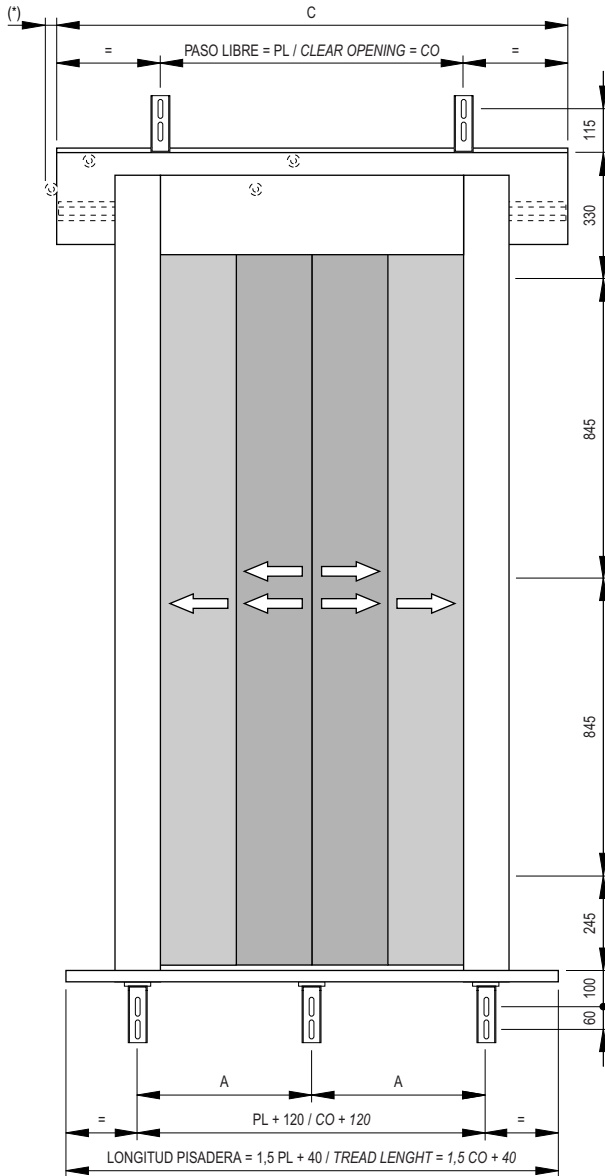

\*: A PARTIR DE PL 950, COTA = 160  
\*: FROM THE CO 950, DIMENSION = 160

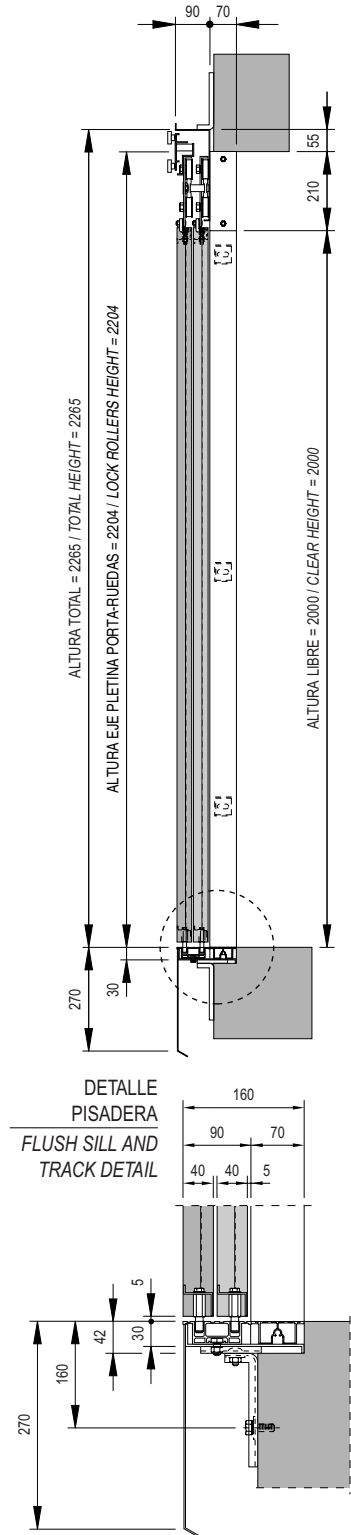

DETALLE PISADERA  
FLUSH SILL AND TRACK DETAIL

PL / CO	600	650	700	750	800	900	1000	1100
A	360	385	410	435	460	340	373	407
C	1050	1100	1150	1225	1300	1450	1600	1750
S	3	3	3	3	3	4	4	4
T	5	5	5	5	5	6	6	6

S: N°. de soportes en apoyo pisadera.

T: N°. de soportes total.

S: Number of supports for support track.

T: Total number of supports.