


ATTENZIONE: OLIO SINTETICO
ATTENTION: SYNTHETIC OIL
ATTENTION: HUILE DE SYNTHÈSE
ACHTUNG: SYNTHETIKOEL

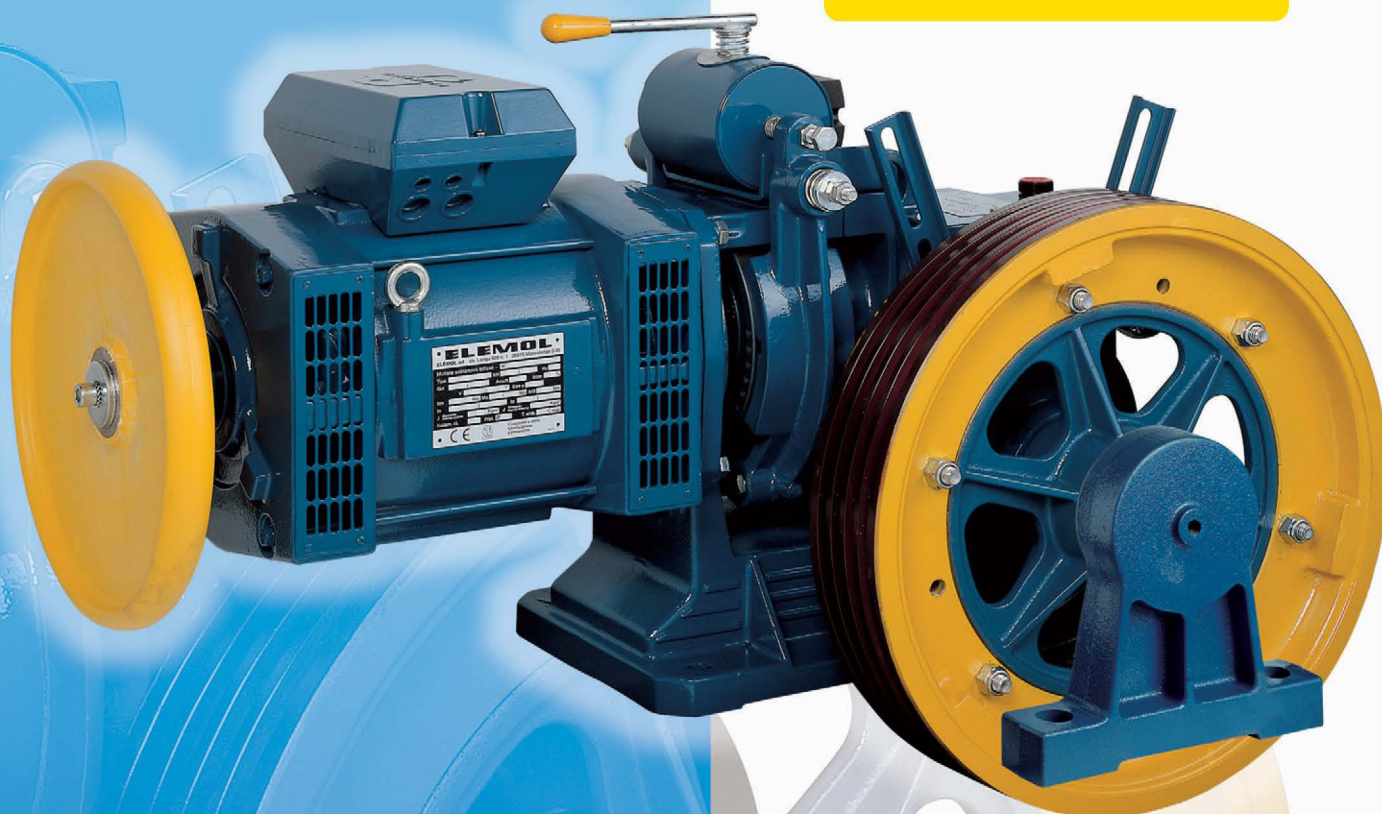

Carico statico
Static load
Charge statique
Statische Belastung



kg. 3200 max

Capacità olio
Oil capacity
Capacité huile
Ölmenge

L. 2,8

Peso argano
Gear weight
Poids treuil
Getriebege wicht

kg. 120

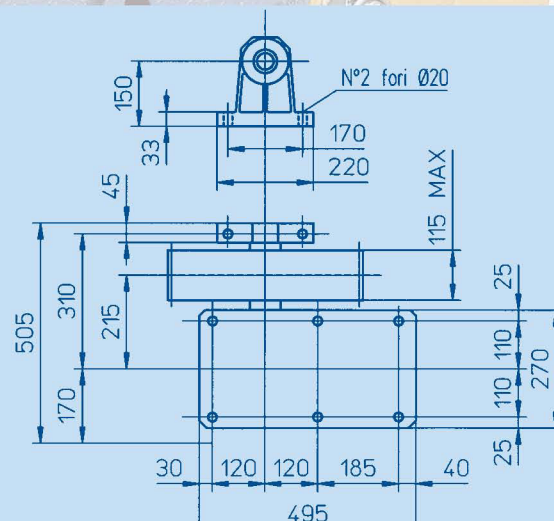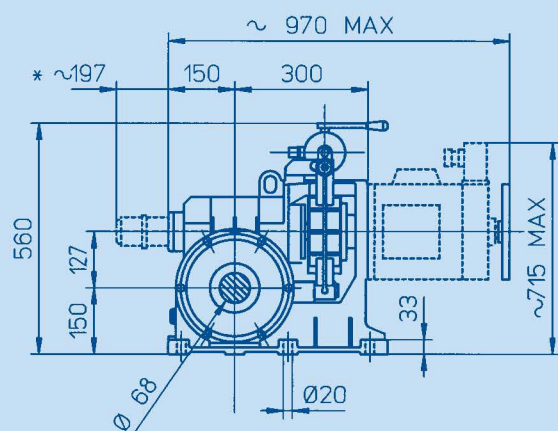

* encoder o dinamo tachimetrica – tacho or encoder – dinamo or encodeur – Tacho oder Impulsgeber



Portate in (daN). Con motori 4/16 poli, 1380/340 R.P.M., tiro 1:1
 Loads in (daN) with motors 4/16 poles, 1380/340 R.P.M., roping 1:1
 Charges en (daN.) avec moteurs 4/16 poles, 1380/340 R.P.M., mouflage 1:1
 Nutzlasten in (daN.) mit 4/16 poligen Motoren, 1380/340 R.P.M., Zug 1:1

Portate in (daN). Con motori 6/24 poli, 920/220 R.P.M., tiro 1:1
 Loads in (daN) with motors 6/24 poles, 920/220 R.P.M., roping 1:1
 Charges en (daN.) avec moteurs 6/24 poles, 920/220 R.P.M., mouflage 1:1
 Nutzlasten in (daN.) mit 6/24 poligen Motoren, 920/220 R.P.M., Zug 1:1

Puleggia Sheave Poulie Treilscheibe Rapporto Ratio Rapport Uebersetzung Vel. Syn. Sync Speed Syn. Vitesse Syn. Geschwindigkeit Vel. Asyn. Asyn. Speed Asyn. Vitesse Asyn. Geschwindigkeit		Rendimento Efficiency Rendement 0,8 Wirkungsgrad		Potenze (kW.) Power (kW.) Puissances (kW.) Leistungen (kW.)		3	3,7	4,4	4,9	5,9	6,6	7,4
		mt/sec	mt/sec									
360	1/52	0,54	0,50	584	720	856	953					
360	1/50	0,57	0,52	577	711	846	942	1111				
400	1/52	0,60	0,56	525	648	770	858					
400	1/50	0,63	0,58	519	640	761	848	1000				
450	1/52	0,68	0,63	467	576	685	763					
450	1/50	0,71	0,65	461	569	677	753	889				
480	1/52	0,72	0,67	438	540	642	715					
480	1/50	0,75	0,69	432	533	634	706	833				
360	1/37	0,76	0,70	478	589	701	781	940	1050			
520	1/52	0,79	0,72	404	498	593	660					
520	1/50	0,82	0,75	399	492	586	652	769				
550	1/52	0,83	0,76	382	471	560	624					
400	1/37	0,85	0,78	430	530	631	703	846	945			
550	1/50	0,86	0,79	377	465	554	616	727				
580	1/52	0,88	0,81	362	447	531	592					
600	1/52	0,91	0,83	350	432	514	572					
580	1/50	0,91	0,84	358	441	525	585	690				
600	1/50	0,94	0,87	346	427	507	565	667				
450	1/37	0,96	0,88	382	472	561	624	752	840			
480	1/37	1,02	0,94	358	442	526	585	705	787			
360	2/55	1,03	0,95	330	407	484	539	649	726	756		
520	1/37	1,10	1,02	331	408	485	540	651	727			
400	2/55	1,14	1,05	297	366	435	485	584	653	680		
550	1/37	1,17	1,07	313	386	459	511	615	687			
580	1/37	1,23	1,13	297	366	435	485	583	652			
600	1/37	1,27	1,17	287	354	421	468	564	630			
450	2/55	1,29	1,18	264	325	387	431	519	581	604		
480	2/55	1,37	1,26	247	305	363	404	487	544	567		
520	2/55	1,49	1,37	228	282	335	373	449	502	523		
360	2/37	1,53	1,41	245	302	359	400	481	538	553		
550	2/55	1,57	1,45	216	266	317	353	425	475	495		
580	2/55	1,66	1,52	205	252	300	334	403	450	469		
400	2/37	1,70	1,56	220	272	323	360	433	484	498		
600	2/55	1,71	1,58	198	244	290	323	389	435	453		
450	2/37	1,91	1,76	196	241	287	320	385	431	442		
480	2/37	2,04	1,87	183	226	269	300	361	404	415		
520	2/37	2,21	2,03	169	209	248	277	333	373	383		
550	2/37	2,33	2,15	160	197	235	262	315	352	362		
580	2/37	2,46	2,27	152	187	223	248	299	334	343		
600	2/37	2,55	2,34	147	181	215	240	289	323	332		

Puleggia Sheave Poulie Treilscheibe Rapporto Ratio Rapport Uebersetzung Vel. Syn. Sync Speed Syn. Vitesse Syn. Geschwindigkeit Vel. Asyn. Asyn. Speed Asyn. Vitesse Asyn. Geschwindigkeit		Rendimento Efficiency Rendement 0,8 Wirkungsgrad		Potenze (kW.) Power (kW.) Puissances (kW.) Leistungen (kW.)		3	3,7	4	4,4	4,9
		mt/sec	mt/sec							
360	1/52	0,36	0,33	840	961					
360	1/50	0,38	0,35	796	981	1061	1111			
400	1/52	0,40	0,37	756	865					
400	1/50	0,42	0,39	716	883	955	1000			
450	1/52	0,45	0,42	672	769					
450	1/50	0,47	0,43	637	785	849	889			
480	1/52	0,48	0,44	630	721					
480	1/50	0,50	0,46	597	736	796	833			
360	1/37	0,51	0,47	708	874	944	1039			
520	1/52	0,52	0,48	581	665					
520	1/50	0,54	0,50	551	679	735	769			
550	1/52	0,55	0,51	550	629					
400	1/37	0,57	0,52	637	786	850	935			
550	1/50	0,58	0,53	521	642	694	727			
580	1/52	0,58	0,54	521	596					
600	1/52	0,60	0,56	504	577					
580	1/50	0,61	0,56	494	609	659	690			
600	1/50	0,63	0,58	477	589	637	667			
450	1/37	0,64	0,59	567	699	756	831			
480	1/37	0,68	0,62	531	655	708	779			
360	2/55	0,69	0,63	476	587	634	698	756		
520	1/37	0,74	0,68	490	605	654	719			
400	2/55	0,76	0,70	428	528	571	628	680		
550	1/37	0,78	0,72	464	572	618	680			
580	1/37	0,82	0,76	440	542	586	645			
600	1/37	0,85	0,78	425	524	567	623			
450	2/55	0,86	0,79	381	469	507	558	604		
480	2/55	0,91	0,84	357	440	476	523	567		
520	2/55	0,99	0,91	329	406	439	483	523		
360	2/37	1,02	0,94	346	426	461	507	553		
550	2/55	1,05	0,96	311	384	415	457	495		
580	2/55	1,10	1,02	295	364	394	433	469		
400	2/37	1,13	1,04	311	384	415	456	498		
600	2/55	1,14	1,05	285	352	381	419	453		
450	2/37	1,27	1,17	277	341	369	406	442		
480	2/37	1,36	1,25	259	320	346	380	415		
520	2/37	1,47	1,35	239	295	319	351	383		
550	2/37	1,56	1,43	226	279	302	332	362		
580	2/37	1,64	1,51	215	265	286	315	343		
600	2/37	1,70	1,56	207	256	277	304	332		

